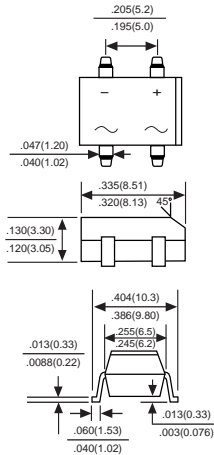


**DBS**


Dimensions in inches and (millimeters)

**FEATURES**

- ◆ Ideal for printed circuit board
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ High temperature soldering guaranteed:
- ◆ 250\*/10 seconds / 0.375"(9.5mm) led length at 5 lbs., (2.3kg)tension
- ◆ Small size, simple installation  
Leads solderable per MIL-STD-202, Method 208
- ◆ High surge current capability

**MECHANICAL DATA**
**Case:** Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on case

**Mounting Position:** Any

**Weight:** 0.02 ounce, 0.4 grams

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25\* ambient temperature unless otherwise specified.


Single phase half-wave 60Hz, resistive or inductive load, For capacitive load derate current by 20%.

Catalog Number	SYMBOLS	DF05S	DF1S	DF2S	DF4S	DF6S	DF8S	DF10S	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=40^*$	$I_{F(AV)}$	1.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							Amps
Maximum instantaneous forward voltage drop per bridge element at 1.0A	$V_F$	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage $T_A=25^*$ $T_A=125^*$	$I_R$	10 500							$\mu A$ $\mu A$
Operating temperature range	$T_J$	-55 to +150							$^{\circ}C$
storage temperature range	$T_{STG}$	-55 to +150							$^{\circ}C$


NOTES: DBS for surface mount package.

# RATINGS AND CHARACTERISTIC CURVES DF05S THRU DF10S


**FIG. 1- MAXIMUM DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

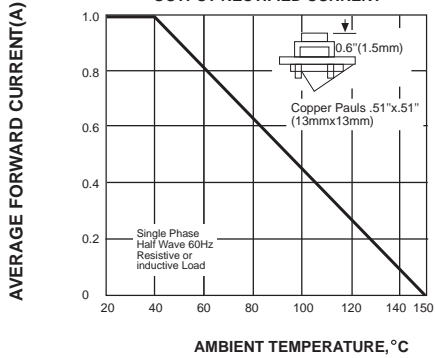


**FIG. 2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

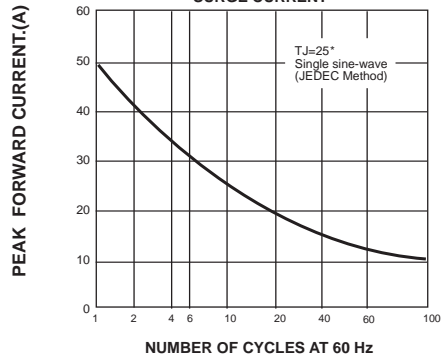

**FIG. 3- TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

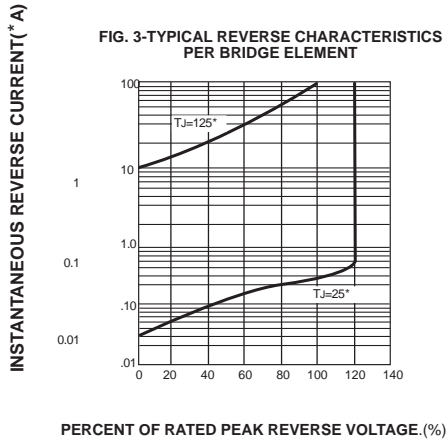

**FIG. 4- TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT**

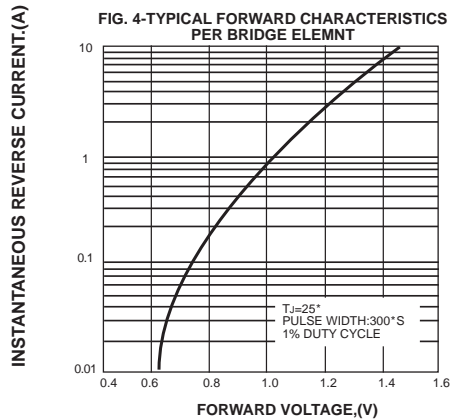

**FIG. 3- TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT**

